




910TC

TOUCHLESS SWITCH

 Energy
12-24VDC
50/25mA

 Range
1" to 2" (30mm - 50mm)



 Switch Mode
Momentary

 Switch Configuration
SPDT

 Warranty
2 Year Limited Warranty

Gesture control with secondary Normally Open (NO) mechanical switch.

910TC TOUCHLESS SWITCH

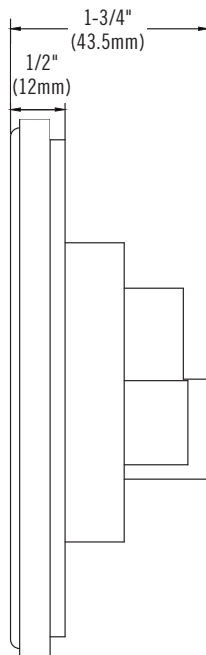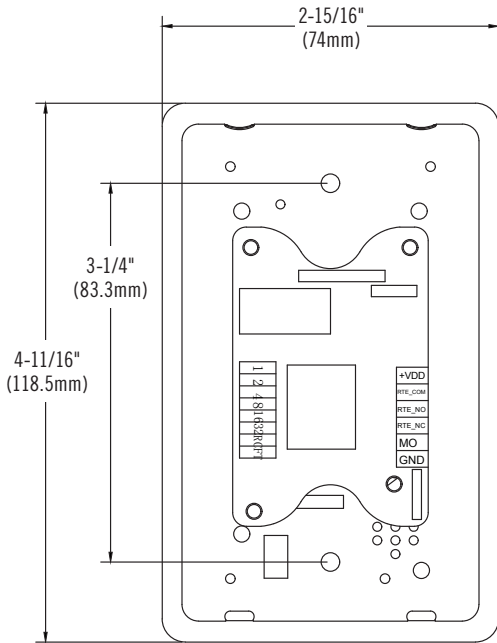


Features

- Unique low-profile touchless actuator plate utilizing capacitive technology for the activation of automatic doors.
- Aesthetically pleasing design.
- Hands-free – helps reduce the spread of germs and bacteria.
- Adjustable detection zone to reduce unwanted activations.
- When the device is activated, the indicator light (waving hand) will change color.
- Secondary Normally Open (NO) mechanical switch in the event of a power loss.
- Selectable unlock times (1-63 seconds).
- Mounts on single-gang electrical box.
- Available remote control to trigger switch remotely.
- May be purchased as a kit (910TC-WRM-WRB). Includes 910TC Switch, 910TC-WRM Remote Receiver Module and 910TC-WRB Remote Transmitter.

Accessories

- 910TC-WRM - 433MHz Remote Receiver Module
- 910TC-WRB - 433MHz Remote Transmitter



910TC-WRM
433MHz Remote
Receiver Module



910TC-WRB
433MHz Remote Transmitter

Applications

- Commercial centers
- Industrial buildings
- Educational facilities
- Retail outlets
- Health care facilities
- Office complexes

Certifications & Testing

- FCC compliant
- ISED compliant



Specifications

Technology Type	Capacitive Sensing
Detection Mode	Proximity
Voltage	12-24VDC
Current	50mA (typical)/ 115mA (activated)
Temperature Range	-4°F to 140°F (-20°C to +60°C)
Detection Zone	Maximum detection zone of up to 2" (50mm)
Relay	Form C SPDT 24VDC@100mA