



## 30-4 Series Rim Mount Electric Strike for Exit Devices

### Features

The SDC 30-4 Series electric strike is designed for use with rim mount exit devices having pullman type latchbolts or the top pullman latch of a surface vertical-rod exit device.

- All stainless steel for corrosion resistance and strength
- Tamper resistant, heavy-duty construction
- Set screws for adjustment lockdown
- Milled ramps to better accommodate deadlatches
- Integrated shim for quick customization of faceplate thickness (3/4" to 1/2")
- In-frame horizontal adjustability
- Pullman keeper
- Non-handed, reversible
- Failsecure (standard) Failsafe (optional)
- 3/4" keeper depth
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.

### Model

- 30-4** Electric Strike with 0.75" (19mm) faceplate.  
 Except .5" (12.7mm) without 1/4" spacer.

### Specifications

- 12** 0.51 Amp @ 12VDC, 24 OHMS  
**24** 0.25 Amp @ 24VDC, 96 OHMS

### Finish



- U** 630 Stainless Steel (standard)  
**D** 606 Dull Brass                      **P** 625 Bright Chrome  
**G** 612 Dull Bronze                    **Q** 626 Dull Chrome  
**H** 613 Oil Rubbed Bronze        **S** 629 Bright Stainless Steel

### Options

- FS**            Failsafe operation  
**LBM-30**    Latchbolt Monitor  
**LCM-30**    Locking Cam Monitor  
**BR64XL**    Rectifier for AC operation

### Listings

- UL 10C, 3 hour fire-rated (fail secure only)
- UL1034, burglary-resistant rated
- ANSI/BHMA A156.31, Grade 1
- CAN4-S104 (ULC-S104) fire door conformant
- DOD approved
- New York City accepted

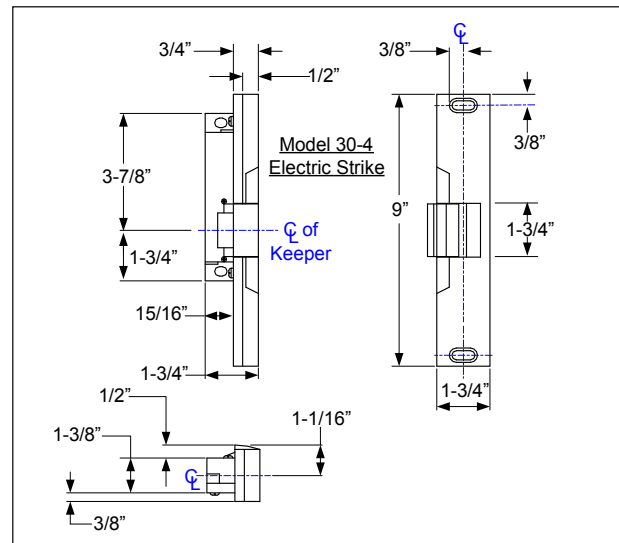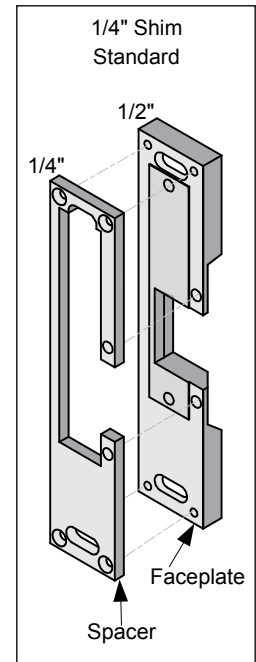

**5 YEAR LIMITED WARRANTY**



**SECURITY DOOR CONTROLS**

sdsecurity.com  
 service@sdsecurity.com

